



Jojo Modular Toilet Hut

STRENGTH • QUALITY • DURABILITY

Jojo VIP Modular Toilet Huts

Good Sanitation is known to have a significant beneficial impact on health, both in households and across communities. In every community Good Sanitation i.e. is having adequate facilities and services for the safe disposal of human urine and faeces, is always critical. Many major diseases like typhoid, dysentery, diarrhea, hepatitis and cholera are caused by simply having insufficient sanitation. Improved water and sanitation facilities in communities and schools positively impact the basic health and education of people and children.

With the Jojo VIP Toilet, sanitation and hygiene become affordable and easy to achieve. The Jojo VIP Toilet improves the standard of hygiene for communities, reducing pollution from human waste, and restoring dignity and hygiene.

The plastic JOJO VIP toilet can be easily installed over the traditional pit (latrine). The JOJO plastic toilet hut is easy to install in the shortest time and with minimum skill. It can also be easily moved when the pit becomes full, thus saving on the expense of reconstruction. With the Jojo VIP Toilet the surrounding area is free of bad odors and is clean.


Floor Type Pit Slab



How it works

Each plastic hut & slab comes with a vent pipe which goes directly from the pit to the roof of the hut. Wind passing over the top, causes a flow of air from the pit, through the vent pipes to the atmosphere and a downdraft through the squat pit hole. This continuous flow of air removes all bad smells from the decomposing excreta in the pit, through the vent pipe leaving the hut with clean air.

Ventilated Improved Pit (VIP) Air Flow Diagram

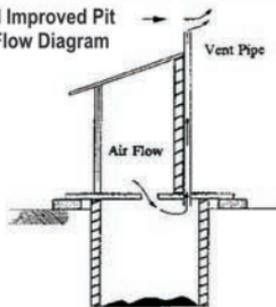

Seat-Type Pit Slab



Installation

Before installation care should be taken to survey the land for :

- Ground water level
- Ground stability, collapsing soils
- Soil drainage etc.

Diagram 1- Stable Soil Installation



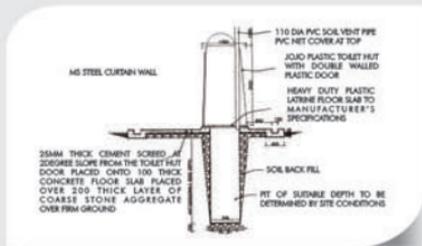


Diagram 2 - Collapsing Soil Installation

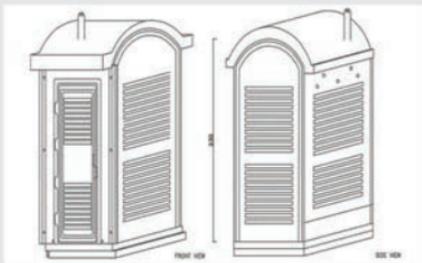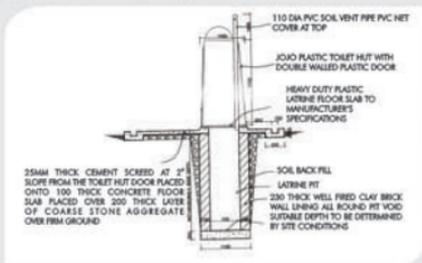

Site

- Should be as far away from habitable buildings as possible
- Ensure entry has easy access
- Ensure water table does not come in contact with pit in any season.

Pit

- Construct pit as per soil conditions
- For collapsing soil, side of pit can be lined with bricks, however ensure that bottom of pit is left UNLINED.
- Dig a drainage channel directing external water away from pit

Slab & Hut


- Place slab over hole making sure narrow opening is close to entry.
- Insert pegs in holes provided to ensure slab stays in position
- Place hut panels over slab in slots provided and bolt together
- Ensure door panel is facing direction of entry
- Place pipe through roof panel and position over hole provided in the slab
- Place roof over panels and bolt in place
- Your VIP latrine is ready for use

Note:


Heavy equipments should NOT be operated near latrine systems.

The JOJO toilet hut comes in a 5 piece stackable model which makes it easy to transport large quantities even to rural locations at a very cost effective rate.

Panels Lined Up

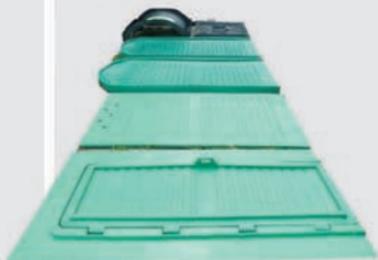

Jojo Toilet Hut: Dimensions of Stacked Panels

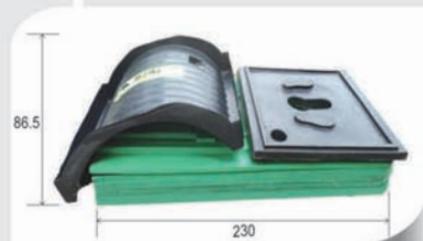

Advantages of Jojo Modular Plastic VIP Toilets

- Its main advantage is in its design.. Being of a modular type it is easily installed on-site.
- Transportation cost is reduced drastically.
- Inbuilt rain-water gutters on roof.
- Modern design can be made in any colour
- Easy, quick on-site installation.
- Cost effective - which reduces with number of 'stance.'
- Made with UV stabilized material.
- Long lasting and portable - can be moved when pit is full.
- Hygienic and easy to clean.
- Available with floor-type slabs and seat type slabs.
- Light weight and high-strength.
- UV-stabilized, sunlight resistant for long life.
- Excellent resistance to fertilizers and other chemicals

Location

